


RL201~RL207

2.0Amp Standard Silicon Rectifiers

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Open Junction chip
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed 250°C/10 seconds at terminals

DO-15

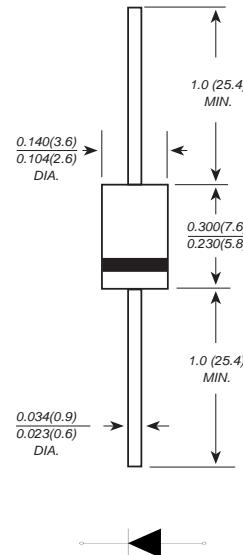

Dimensions in inches and (millimeters)

Mechanical Data

Case : Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.0116 ounce, 0.33 grams

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	RL201	RL202	RL203	RL204	RL205	RL206	RL207	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at T _L =100°C	I _(AV)	2.0						A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	60.0						A	
Maximum instantaneous forward voltage at 2.0A	V _F	1.10						V	
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =125°C	I _R	10.0 500						uA	
Typical junction capacitance (Note1)	C _J	45.0						pF	
Typical thermal resistance	R _{QJA}	75.0						°C/W	
Operating junction and storage temperature range	T _{J,T_{STG}}	-55 to +150						°C	

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

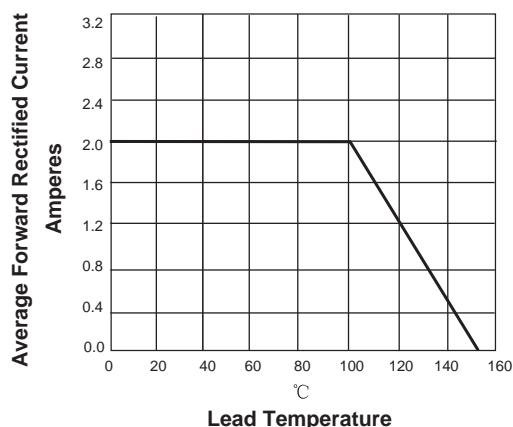


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

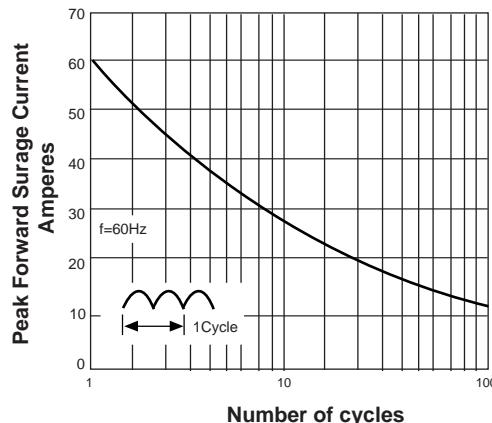


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

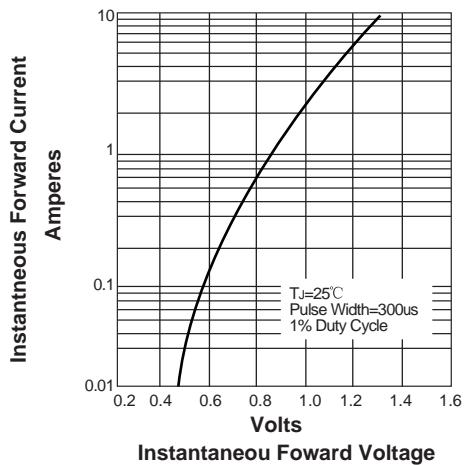


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

